


EMG

pneumatic press 2T LP

State	NEW
Category	Press
Brand	EMG
Model	2T
Serial number	-
Year of manufacture	-
Inventory number	100004

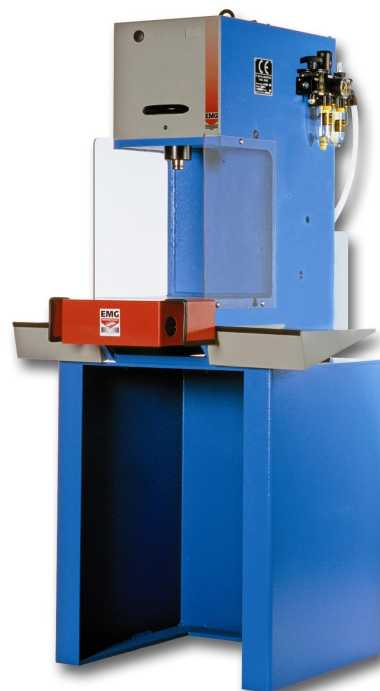

CHARACTERISTICS

Technical data
Adjustable stroke : from 0 to 69 mm
Swan-neck depth: 180 mm
Shut height : 315 mm
Strokes per minute : 30
VERSION 1

Machine delivered without any equipment and any control

VERSION 2

Bi-manual push-button safety control
Lateral protection panels
Distributor
Regulating and lubricating filter
Machine fixed on to its plinth, connected ready to work

VERSION 3 Version 2 with :

Pedal control to work protected tool (no risk for the operator)
Key-control selector
Machine fixed on to its plinth, connected ready to work

COMPOSITION AND ACCESSORIES

Options (non-included)

Base support to let legs through
Set of 2 lateral panels, dimensions 350 x 250 (only with based support)
5-digit counter with reset switch
Bottom dead centre fine adjustment
Blocking of the press at dead bottom centre (control with the bimanual to go up and down)
Pause at dead bottom centre
Excess flow valve for descent speed regulation
Full set of filter & exhaust pipes to decrease level noise
Additional regulator to work with pressure under 3 bar (mini 0.5 bar)
Power regulator with needle pressure gauge : cycle repetition and 3 % precision (mini 0.5 bar)
Power regulator with digital pressure gauge : cycle repetition and 1 % precision (mini 0.5 bar)
Set of 2 anvil stakes for T groove
Set of 4 anti-vibration supports
Set of 4 rotating wheels with brake, for base support
ER25 collet holder, with a collet chuck (2 to 16 mm Ø) and key of tightening
Maintenance kit
Parts quality system with force and displacement transducer

