


EMG pneumatic press 1T

State	NEW
Category	Press
Brand	EMG
Model	1T
Serial number	-
Year of manufacture	-
Inventory number	100001

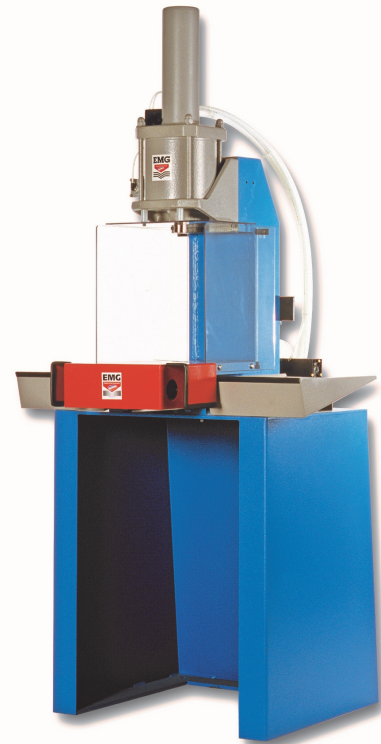

CHARACTERISTICS

Adjustable stroke : from 0 to 100 mm
 Swan-neck depth : 100 mm
 Shut height : from 140 to 200 mm
 Strokes per minute : 35
 VERSION 1

Machine delivered without any equipment and any control

VERSION 2

Bi-manual push-button safety control
 lateral protection panels
 Distributor
 Regulating and lubricating filter
 Machine fixed on to its plinth, connected ready to work

VERSION 3 Version 2 with :

Pedal control to work protected tool (no risk for the operator)
 Key-control selector
 Machine fixed on to its plinth, connected ready to work

COMPOSITION AND ACCESSORIES

Options (non-included)

Based support 450 mm section to let legs through
 Set of 2 lateral panels, dimensions 350 x 250 (only with based support)
 5-digit counter with reset switch
 Bottom dead centre fine adjustment
 Blocking of the press at dead bottom centre (control with the bimanual to go up and down)
 Pause at dead bottom centre
 Excess flow valve for descent speed regulation
 Full set of filter & exhaust pipes to decrease level noise
 Additional regulator to work with pressure under 3 bar (mini 0.5 bar)
 Power regulator with needle pressure gauge : cycle repetition and 3 % precision (mini 0.5 bar)
 Power regulator with digital pressure gauge : cycle repetition and 1 % precision (mini 0.5 bar)
 Set of 2 anvil stakes for T groove M10
 Set of 4 anti-vibration supports ? 46
 Maintenance kit
 ER25 collet holder, with a collet chuck (2 to 16 mm Ø) and key of tightening
 Set of 4 rotating wheels with brake, for base support
 Parts quality system with force and displacement transducer

